

Ultrason® S 2010 NAT
PSU

BASF

Unreinforced, medium viscosity standard injection moulding grade.
Abbreviated designation according to ISO 1043-1: PSU

Processing/Physical Characteristics	Value	Unit	Test Standard
ASTM Data			
Mold Shrinkage, MD	0.006	mm/mm	ASTM D 955
Density, 73°F	1240	kg/m ³	ASTM D 792

Rheological properties	dry / cond	Unit	Test Standard
ISO Data			
Melt volume-flow rate, MVR	90 / *	cm ³ /10min	ISO 1133
Temperature	360 / *	°C	-
Load	10 / *	kg	-
Molding shrinkage, parallel	0.7 / *	%	ISO 294-4, 2577
Molding shrinkage, normal	0.7 / *	%	ISO 294-4, 2577

Mechanical Properties	dry / cond	Unit	Test Standard
ISO Data			
Tensile Modulus	- / 2550	MPa	ISO 527
Yield stress	- / 75	MPa	ISO 527
Yield strain	- / 6	%	ISO 527
Nominal strain at break	- / >50	%	ISO 527
Tensile Creep Modulus, 1h	* / 2500	MPa	ISO 899-1
Impact Strength (Charpy), +23°C	- / no break	kJ/m ²	ISO 179/1eU
Impact Strength (Charpy), -30°C	- / no break	kJ/m ²	ISO 179/1eU
Notched Impact Strength (Charpy), +23°C	- / 5.5	kJ/m ²	ISO 179/1eA
Notched Impact Strength (Charpy), -30°C	- / 6	kJ/m ²	ISO 179/1eA
ASTM Data			
Tensile Strength at Yield	80 / -	MPa	ASTM D 638
Elongation at Yield	5.7 / -	%	ASTM D 638
Flexural Modulus	2599 / -	MPa	ASTM D 790
Notched Impact Strength (Izod), 1/8 in	10 / -	J/m	ASTM D 256

Thermal Properties	dry / cond	Unit	Test Standard
ISO Data			
Glass Transition Temperature (10°C/min)	187 / *	°C	ISO 11357-1/-2
Temp. of deflection under load (1.80 MPa)	176 / *	°C	ISO 75-1/-2
Temp. of deflection under load (0.45 MPa)	181 / *	°C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	180 / *	°C	ISO 306
Coeff. of Linear Therm. Expansion, parallel	53 / *	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nom. Thickn.	HB / *	class	UL 94
Thickness tested	1.6 / *	mm	-
UL recognition	yes / *	-	-
Burning Behav. at thickness h	V-2 / *	class	UL 94
Thickness tested	3.2 / *	mm	-
UL recognition	yes / *	-	-
Oxygen index	32 / *	%	ISO 4589-1/-2
ASTM Data			
DTUL @ 66 psi	179	°C	ASTM D 648
DTUL @ 264 psi	167	°C	ASTM D 648

Electrical Properties	dry / cond	Unit	Test Standard
ISO Data			
Relative permittivity, 100Hz	- / 3.1	-	IEC 62631-2-1
Relative permittivity, 1MHz	- / 3.1	-	IEC 62631-2-1
Dissipation Factor, 100Hz	- / 8	E-4	IEC 62631-2-1
Dissipation Factor, 1MHz	- / 64	E-4	IEC 62631-2-1
Volume Resistivity	- / >1E13	Ohm*m	IEC 62631-3-1
Surface Resistivity	* / >1E15	Ohm	IEC 62631-3-2
Electric Strength	- / 40	kV/mm	IEC 60243-1
Comparative tracking index	- / 125	-	IEC 60112

Other Properties	dry / cond	Unit	Test Standard
ISO Data			
Water Absorption	0.8 / *	%	Sim. to ISO 62
Humidity absorption	0.3 / *	%	Sim. to ISO 62
Density	1230 / -	kg/m ³	ISO 1183


Material Specific Properties	dry / cond	Unit	Test Standard
ISO Data			
Viscosity number	63 / *	cm ³ /g	ISO 307, 1157, 1628

Rheological calculation properties	Value	Unit	Test Standard
ISO Data			
Density of melt	1090	kg/m ³	-
Thermal Conductivity of Melt	0.15	W/(m K)	-
Spec. heat capacity of melt	2170	J/(kg K)	-
Eff. thermal diffusivity	6.34E-8	m ² /s	-
Ejection temperature	165	°C	-


Test specimen production	Value	Unit	Test Standard
ISO Data			
Injection Molding, melt temperature	350	°C	ISO 294
Injection Molding, mold temperature	140	°C	ISO 294
Injection Molding, injection velocity	200	mm/s	ISO 294
Injection Molding, pressure at hold	60	MPa	ISO 294

Diagrams


Viscosity-shear rate

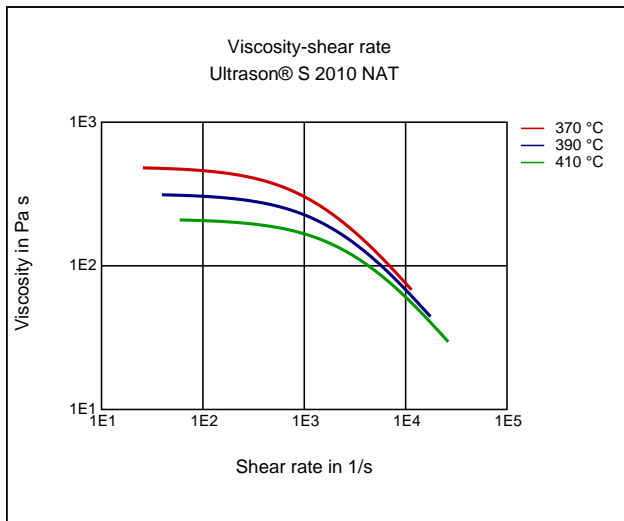


Shearstress-shear rate

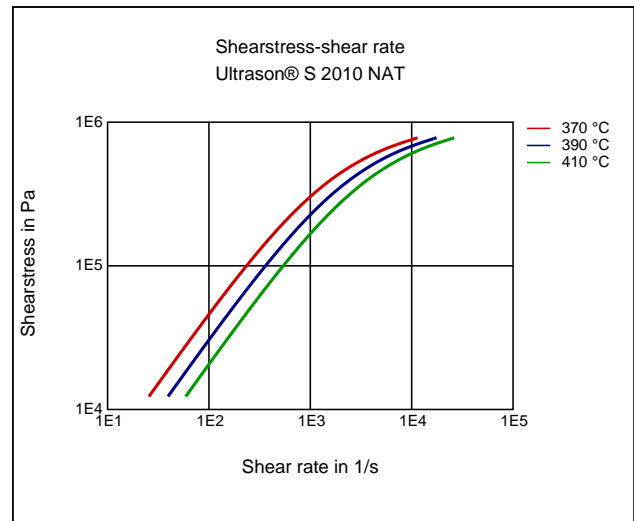


Dynamic Shear modulus-temperature

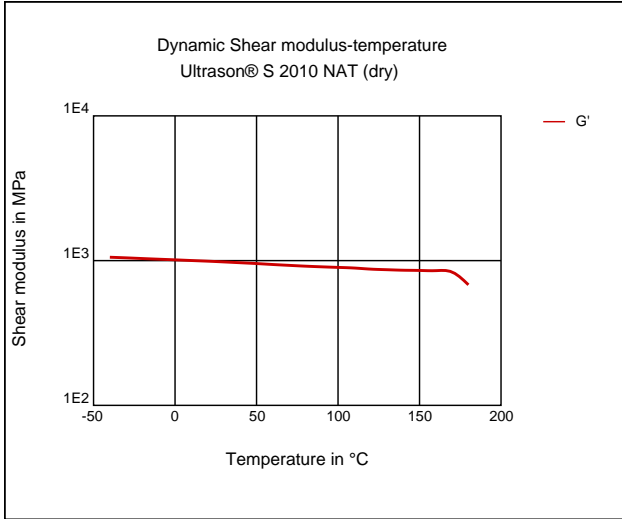


Stress-strain

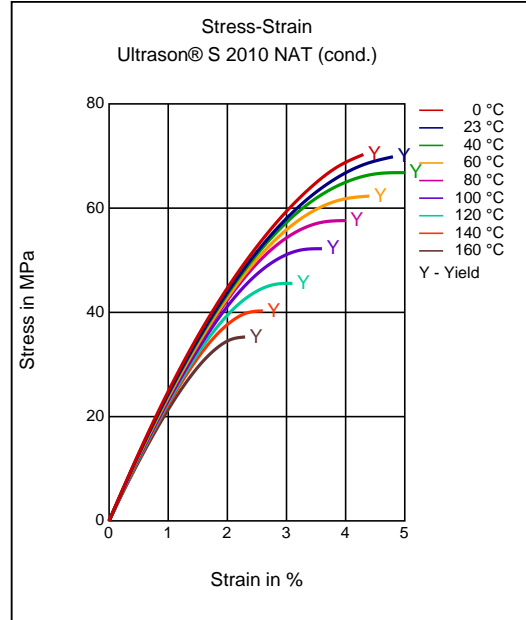


Secant modulus-strain

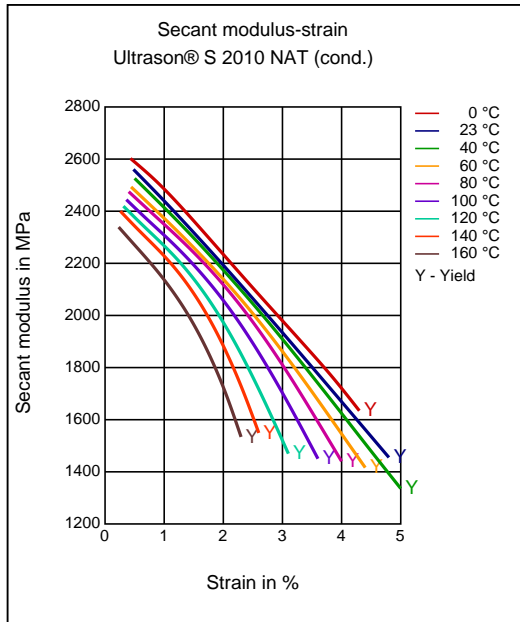

Specific volume-temperature (pvT)

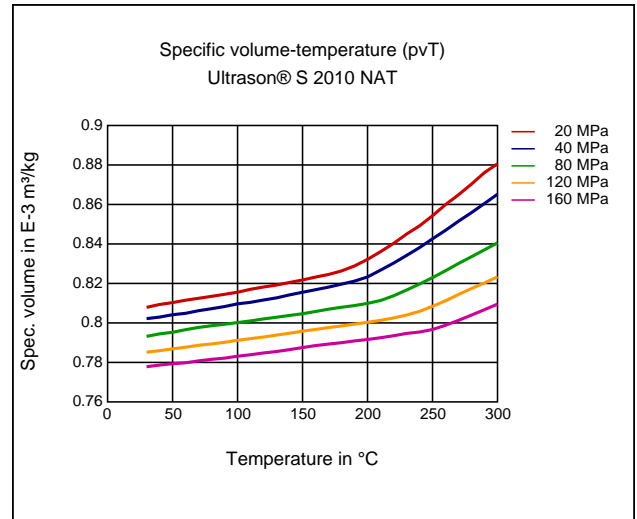

Tensile Modulus-Temperature

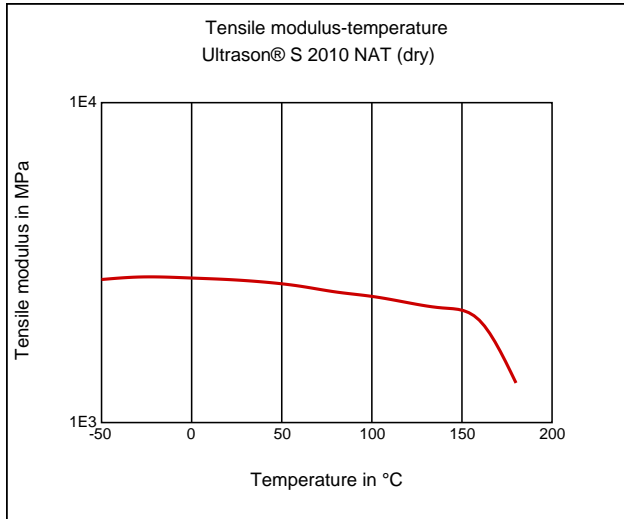

Characteristics

Processing

Injection Molding, Film Extrusion, Profile Extrusion, Sheet Extrusion, Blow Molding, Thermoforming

Delivery form

Pellets, Natural Color

Injection Molding

PREPROCESSING

Pre/Post-processing, max. allowed water content: .02 %
Pre/Post-processing, Pre-drying, Temperature: 140 °C
Pre/Post-processing, Pre-drying, Time: 4 h

PROCESSING

injection molding, Melt temperature, range: 330 - 390 °C
injection molding, Melt temperature, recommended: 350 °C
injection molding, Mold temperature, range: 120 - 160 °C
injection molding, Mold temperature, recommended: 140 °C
injection molding, Dwell time, thermoplastics: 10 min

Pretreatment

Drying temperature: 130 - 150 °C
Drying time: minimum 4h
recommended dryer: vacuum or dry air dryer
maximum moisture: 0,02 - 0,05%

Ultrason® can be injection molded by any type of machinery on the market, provided that the plasticizing unit and the mold temperature control system have been configured appropriately. The machinery manufacturer must be consulted if any doubts exist on the ability of various parts to withstand the high temperatures required (e.g. barrel, barrel head, bolted connections, etc.)

Long residence time in combination with high temperatures should be avoided e.g. by pump out material at regular intervals. During extended interruptions, the barrel temperature should be lowered to about 250-280 °C.

It has been found out that heating to the requested processing temperature and shutting down or lowering the temperature is best carried out in two steps.

First, the barrel temperatures are set at the lower processing temperature range for the particular thermoplastic (340 - 350 °C). As soon as these temperatures have reached a steady state, the material in the barrel is pumped out. Second, the barrel temperature can be set to the required processing temperature or the heaters can be shut down.

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23°C)
- ✓ Citric Acid solution (10% by mass) (23°C)
- ✓ Sulfuric Acid (38% by mass) (23°C)
- ✓ Sulfuric Acid (5% by mass) (23°C)

Bases

- ✓ Sodium Hydroxide solution (35% by mass) (23°C)
- ✓ Sodium Hydroxide solution (1% by mass) (23°C)

Alcohols

- ✓ Isopropyl alcohol (23°C)
- ✗ Ethanol (23°C)

Hydrocarbons

- ✗ Toluene (23°C)
- ✓ iso-Octane (23°C)

Ketones

- ✗ Acetone (23°C)

Ethers

- ✓ Diethyl ether (23°C)

Salt solutions

- ✓ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)

Other

- ✓ Ethyl Acetate (23°C)
- ✗ DOT No. 4 Brake fluid (130°C)
- ✓ Ethylene Glycol (50% by mass) in water (108°C)
- ✓ Water (23°C)
- ✓ Deionized water (90°C)
- ✗ Phenol solution (5% by mass) (23°C)

Disclaimer

Liability Exclusion

These guide values are measured and provided by the product manufacturer and have been determined on standardised test specimens and can be affected by pigmentation, mould design and processing conditions. M-Base has taken the guide values from the producer's original Technical Data Sheet. **ALBIS AND M-BASE ARE THEREFORE NOT RESPONSIBLE FOR THE ACCURACY OF THE GUIDE VALUES AND CANNOT GIVE ANY WARRANTY WITH REGARD TO THEIR CORRECTNESS.**

Any information given on the chemical and physical characteristics of our products, including, without limitation, technical advice on applications, whether verbally, in writing or by testing the product, is given to the best of our knowledge and in good faith and does not exempt the buyer from carrying out their own investigations and tests in order to ascertain the product's specific suitability for the purpose intended.

The buyer is solely responsible for confirming the suitability of the product for a particular application, its utilization and processing and must observe any applicable laws and government regulations. **NO EXPRESS OR IMPLIED RECOMMENDATION OR WARRANTY IS GIVEN WITH REGARD TO THE SUITABILITY OF THE PRODUCT FOR A PARTICULAR APPLICATION, SUCH AS, BUT NOT LIMITED TO, SAFETY-CRITICAL COMPONENTS OR SYSTEMS.**

Healthcare uses: the supply of any product by ALBIS for any medical, pharmaceutical or diagnostic application is conditional to an assessment by ALBIS in terms of compliance with ALBIS' internal risk management policy – even for products which are in general designated for use in Healthcare applications.

Important: irrespective of product type or designation, ALBIS does not recommend or support the use of any products it supplies which fall into the following medical, pharmaceutical or diagnostic application categories:

- risk class III applications according to EU directive 93/42/EEC
- any bodily implant application for greater than 30 days
- any critical component in any medical device that supports or sustains human life.

At all times, our standard terms and conditions of sale apply.